


HDR-731


Streaming Media Processor



Product Features

- ▶ 4-CH FHD 1080P60 video inputs as the video sources for IP streaming.
- ▶ 2-CH HDMI outputs: for Director View or PGM (programmed video) view.
- ▶ 4-CH input video & PGM recording, completely preserving your audiovisual data.
- ▶ Director interface for live-streaming, recording, snapshot, volume bar, PGM preview, HDMI 1~4 input source switch, 9 layout switch, and camera control & preset point setting. Available with keyboard & mouse integration for easy operation.
- ▶ Supports RTMP, HLS, and RTSP protocols for broadcasting videos online. You can live-stream to any four platforms simultaneously.
- ▶ Web UI with powerful functions including video source control / switch, video playback, file saving & backup, live-streaming & recording setting, firmware update, and more.
- ▶ Self-defined PGM layout: set text color / size and limitless overlay images, add local time, set background color, partially cut the image of video source, and more.
- ▶ HDMI or analog stereo for 4-CH audio input: the audio sources can be mixed and the volume of each source can be adjusted individually.
- ▶ Scheduling: preset the time for recording, streaming, and back-up.
- ▶ Supports the export / import of layouts and configuration files, no reset required.
- ▶ Built-in 1TB hard drive. You can save files via USB hard disk or NAS and FTP.

Diagram

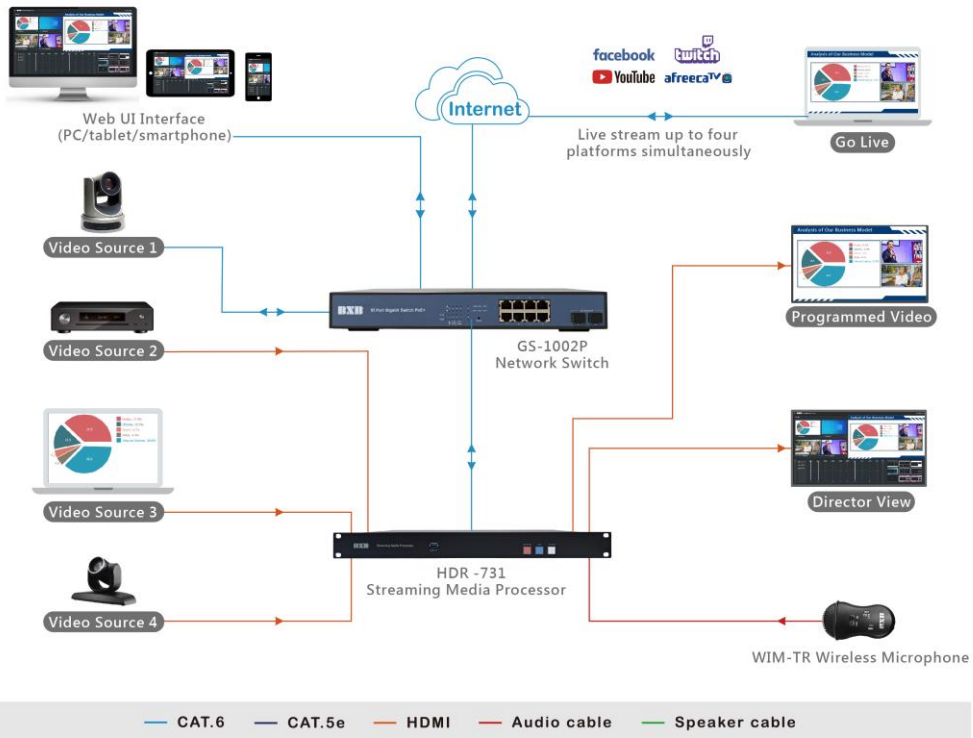

Hardware Specifications

HDMI Inputs	Type-A x 4
HDMI Outputs	Type-A x 2
Audio Inputs	3.5mm x 4
Audio Outputs	3.5mm x 1
Power Button	Rocker switch x 1
TCP/IP	RJ45 x 1
RS232 Control	Euro type terminal block 3P x 1
RS485 Control	Euro type terminal block 3P x 1
USB for Hard Disk	Type-A (3.0) x 1
USB for Keyboard & Mouse	Type-A (2.0) x 2
Capacity	1TB

Physical Properties

Dimensions (HWD)	44 x 483 x 205mm (including rack shelf)
	44 x 432 x 205mm (not including rack shelf)
Rack Mount 19"	1U
Weight	2.43kg
Operating Temperature	0-40°C
Storage Temperature	-20-60°C
Relative Humidity	0-80% non-condensing
Material	Metal

Power Supply

External Power Supply	DC12V / 3.34A
AC Input	AC 100~240V / 50~60Hz
Power Consumption	40W